


Ports for ISDN S2M (PRI) Mode:

- L1+ (Rx ring) at Pin 1 of P9 (Line 0)
- L1- (Rx ring) at Pin 2 of P9 (Line 0)
- L2+ (Rx ring) at Pin 1 of P10 (Line 1)
- L2- (Rx ring) at Pin 2 of P10 (Line 1)

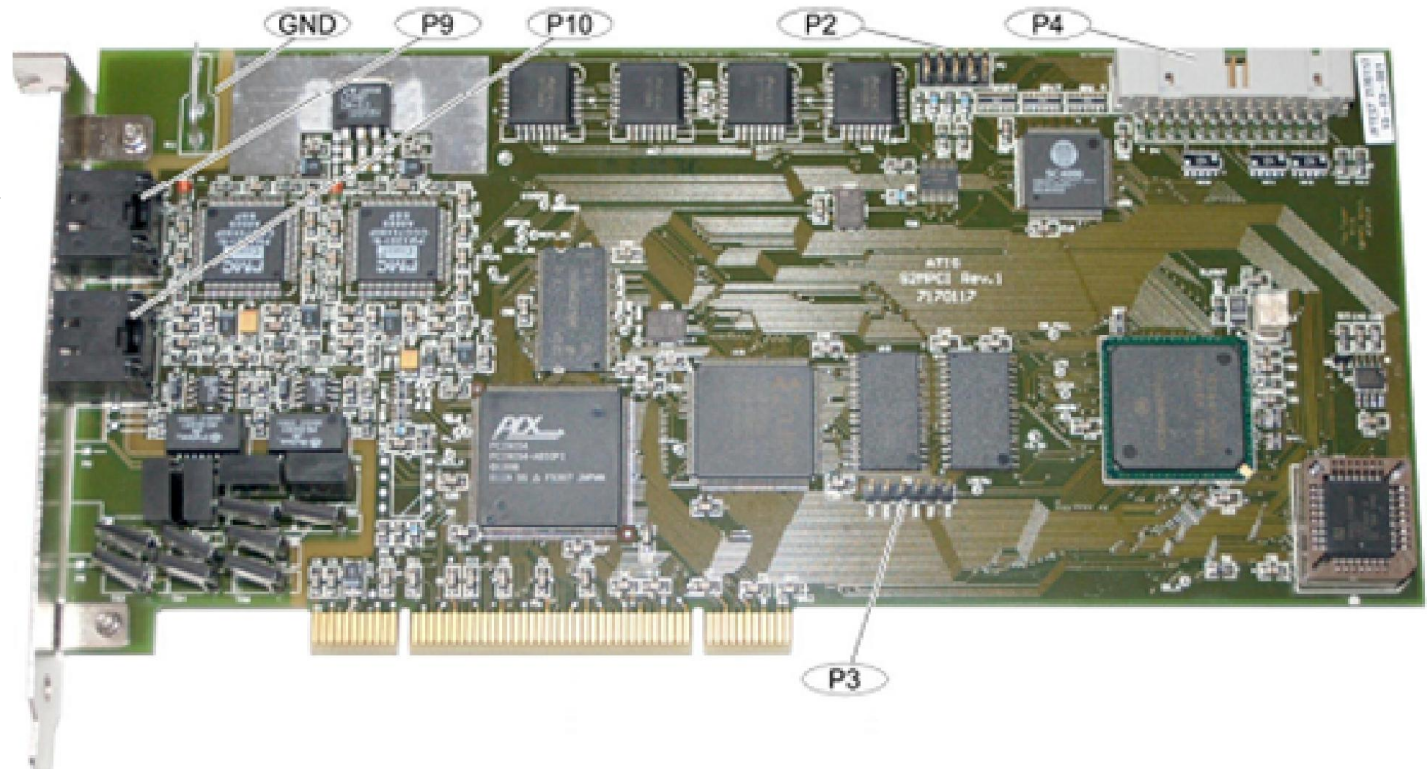

Pinout of RJ45 (P9) and P10:

	Pin	Function
	1	Rx ring
	2	Rx tip
	3	Not connected
	4	Not connected
	5	Not connected
	6	Not connected
	7	Not connected
	8	Not connected

					VoiceCollect	VoiceCollect GmbH Justus-von-Liebig-Str.5 61352 Bad Honnburg
				Customer	ISDN S2M (PRI) Interface Baord	
				Project		
					Article-No	7170117
					Replace	
					Replace by	
	00001	13.04.2017	PE			
	Rev.No.	Date	Name			
	Release of production / Modification					