

How to Upgrade:

The Dongle License


Voice Recording System VC-MDX

Version 1907

To modify the license of a dongle, you must create a license request file. This document will show you how to create this request file and how to upgrade the dongle with the new configuration file

The request file, will give us the latest configuration of your dongle. Without this file, it is impossible for us to modify your configuration. Of course, for each request you need to create a new request file. A request file is unique. If you have many Recorders with the same configuration, you need to create a request file for each Recorder and you will receive an update file per Recorder.

To create a request file, go to “Windows” – “All programs” – “Codemeter” and “Codemeter Control Center”:

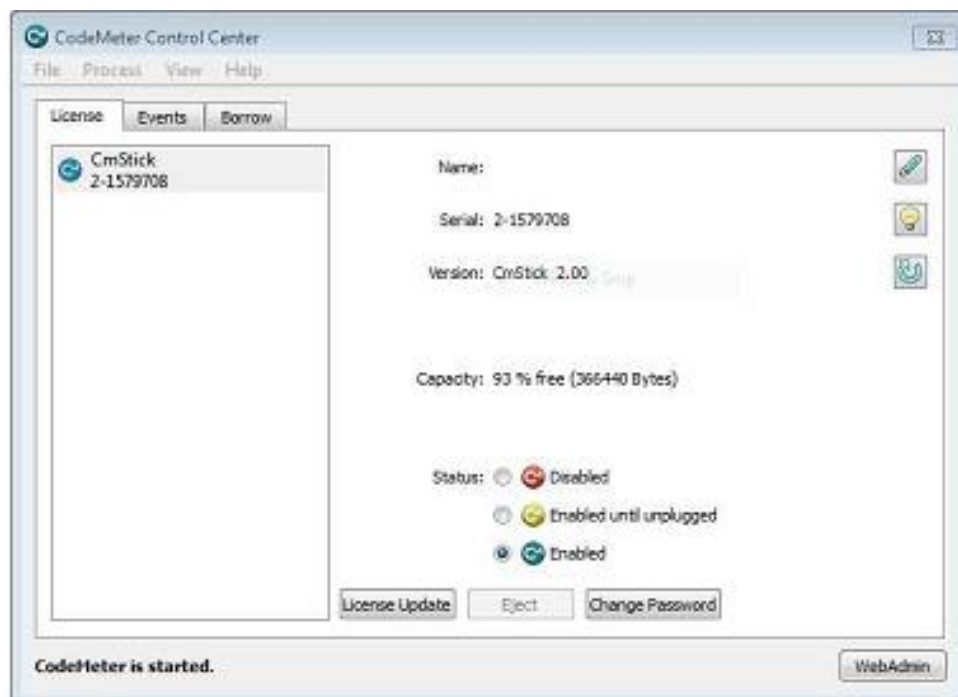

In this window, we can see the serial number of the dongle and the version of the firmware. To create the context file, please click on “License Update” and follow the steps below:



Click "Next"



Click "Next"



Click "Next"



Click "Next"





Select the path to save the request file. Please don't change the name of the file. This name is unique and made up of the serial number with the extension ".WibuCmRaC". Click "Commit" and "Finish".

Please send to us by mail this file with the new required configuration.

After the upgrade of the license in our factory, you will receive by mail a new file with the name "Dongle_serial_number.WibuCmRaU".

Before applying the new configuration, it's necessary to close the Recorder application (Stop the channels and close the application). Copy this license update file to the desktop and double-click on it:

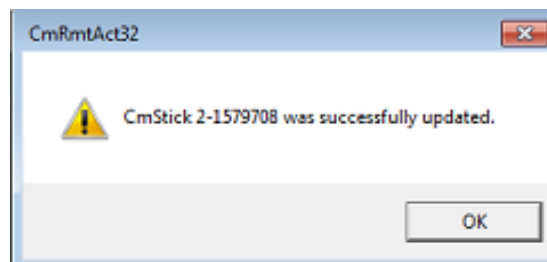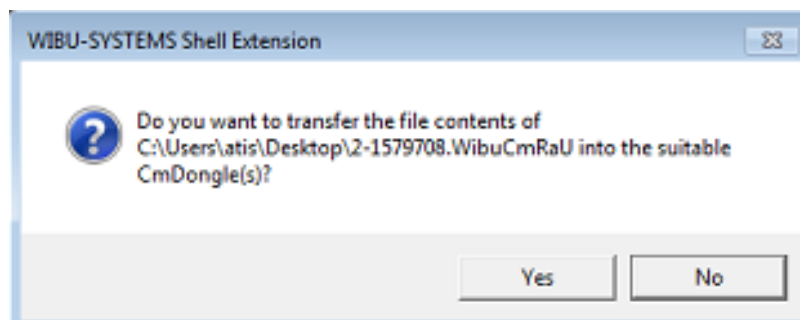

Click "Yes" and after a few seconds, the upgrade is applied with success.

Now when you restart the Recorder application, the new options are available. If you add a new hardware card, it is necessary first go to the Configurator to add the new cards.

***** End of Document*****